


OPENING	LENGTH (L)	GATE POSTS (G)	BAYS	OVERHANG
I/S POST FACE TO I/S POST FACE	O/S DIM OF GATE LEAF	O/S POST FACE TO O/S POST FACE	NUMBER OF BAYS WITH CHAIN LINK	NUMBER OF BAYS WITHOUT CHAIN LINK
6'-0"	11'-0"	5'-0"	(1) ONE	(1) ONE
7'-0"	12'-0"	5'-0"	(1) ONE	(1) ONE
8'-0"	13'-0"	5'-0"	(1) ONE	(1) ONE
9'-0"	14'-0"	5'-0"	(2) TWO	(1) ONE
10'-0"	15'-0"	5'-0"	(2) TWO	(1) ONE
12'-0"	18'-0"	6'-0"	(2) TWO	(1) ONE
14'-0"	20'-6"	6'-0"	(2) TWO	(1) ONE
16'-0"	23'-6"	7'-0"	(3) THREE	(2) TWO
18'-0"	26'-0"	7'-6"	(3) THREE	(2) TWO
20'-0"	28'-6"	8'-0"	(3) THREE	(2) TWO
22'-0"	31'-6"	9'-0"	(4) FOUR	(2) TWO
24'-0"	34'-6"	10'-0"	(4) FOUR	(2) TWO
26'-0"	37'-6"	11'-0"	(4) FOUR	(2) TWO
28'-0"	40'-6"	12'-0"	(5) FIVE	(2) TWO
30'-0"	42'-6"	12'-0"	(5) FIVE	(2) TWO

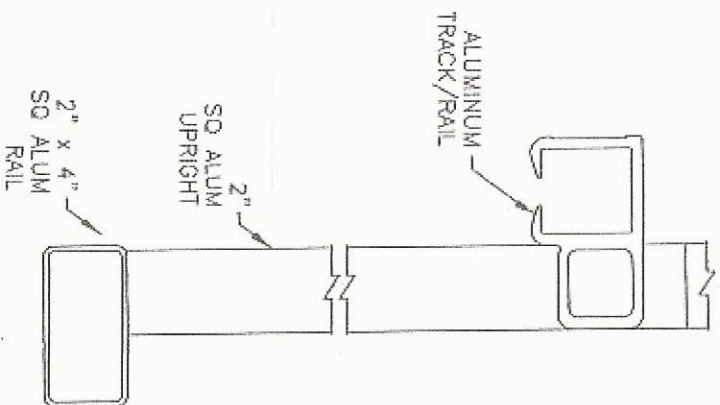

SEC A  
(6' THRU 30' OPENINGS)

SEE SHEET #1  
FOR ELEV & PLAN

International Gate Devices  
800-557-GATE (4283)

SINGLE CANTILEVERED SLIDING GATE  
ROUND POSTS, W/ BARBED WIRE

DWG: ST#2  
BY:  
DATE: